


NOTE: Digital lines must be terminated!
The following devices terminate their outputs automatically:

- PDU15
- PSU04
- all delegate and interpreter units

All cables: Shielded CAT5 (AWG26)

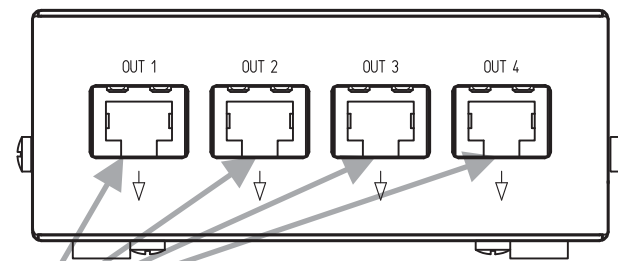

Outputs OUT 1 - OUT 4

to


- DV9 / PV9
- DOLV
- PSU01SL + delegate / interpreter unit

SHORT

1 - 30 m (3.3 - 98.4 ft) CAT5 cable

LONG

20 - 100m (65.6 - 328 ft) CAT5 cable

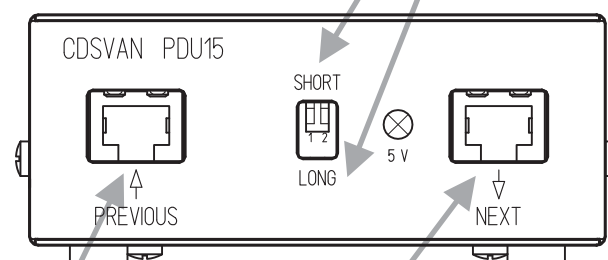

PREVIOUS

from


- PSU04
- PSU01MA
- previous PDU15

NEXT


to

- next PDU15
- PSU01SL + delegate / interpreter unit
- DV9 / PV9
- DOLV


Application 1
(as a unit distributor)

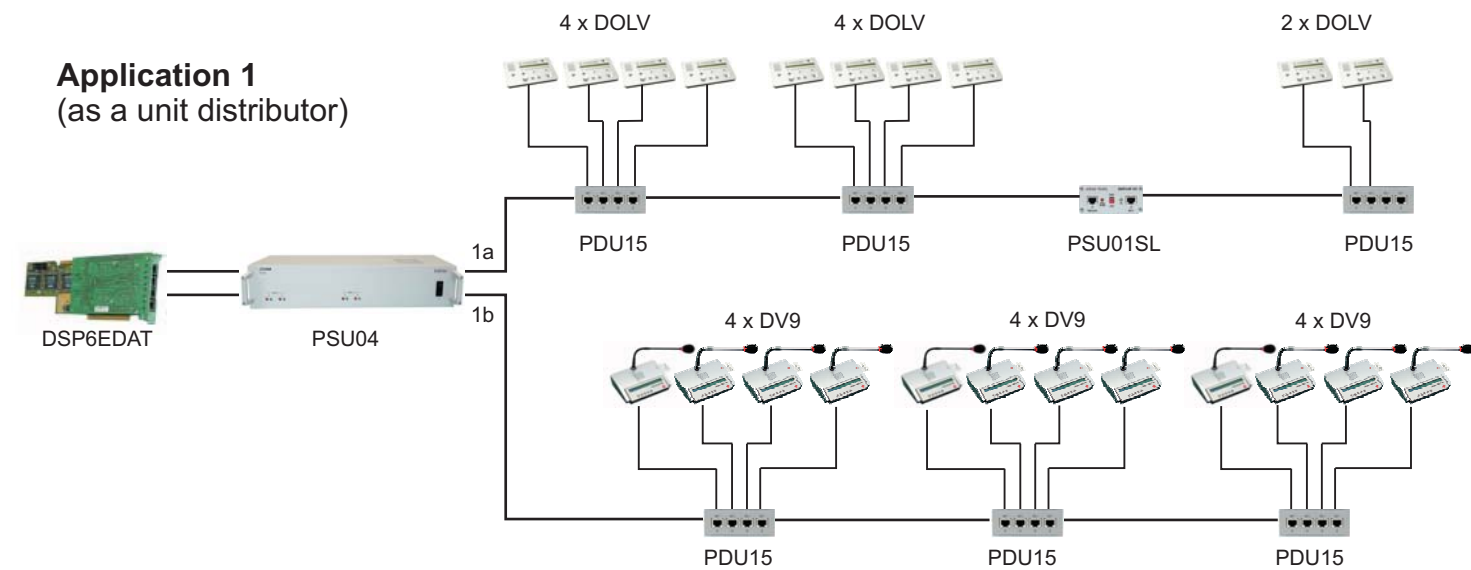

Application 2
(as a line distributor)

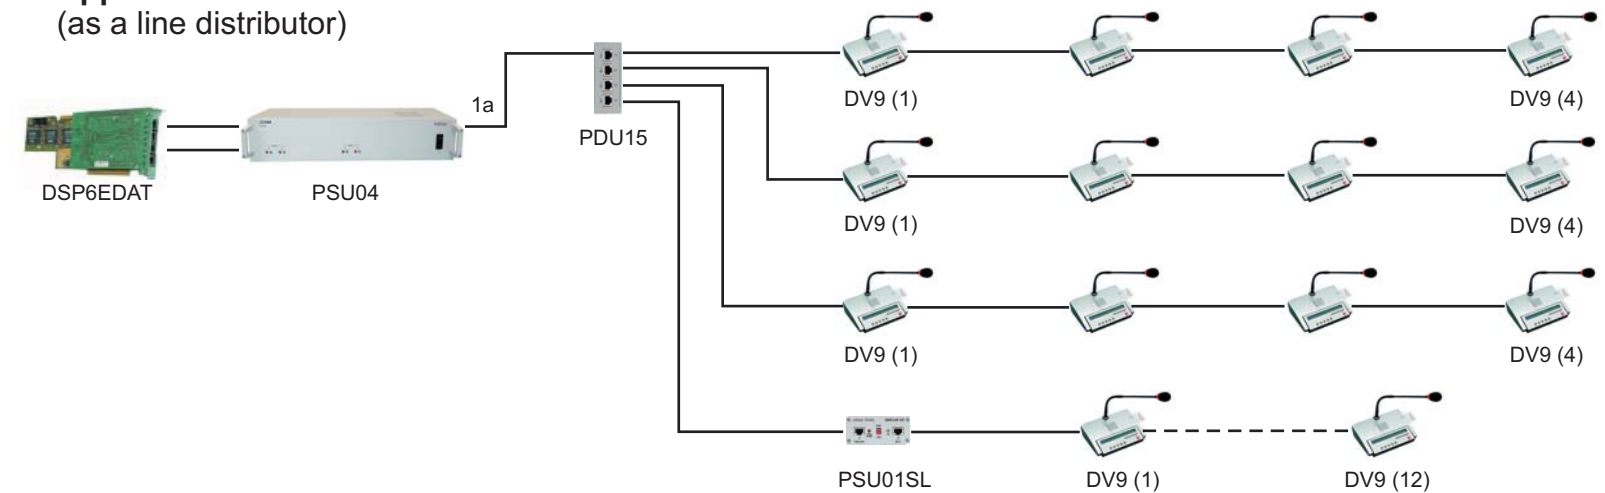

Not allowed
(marked with X)

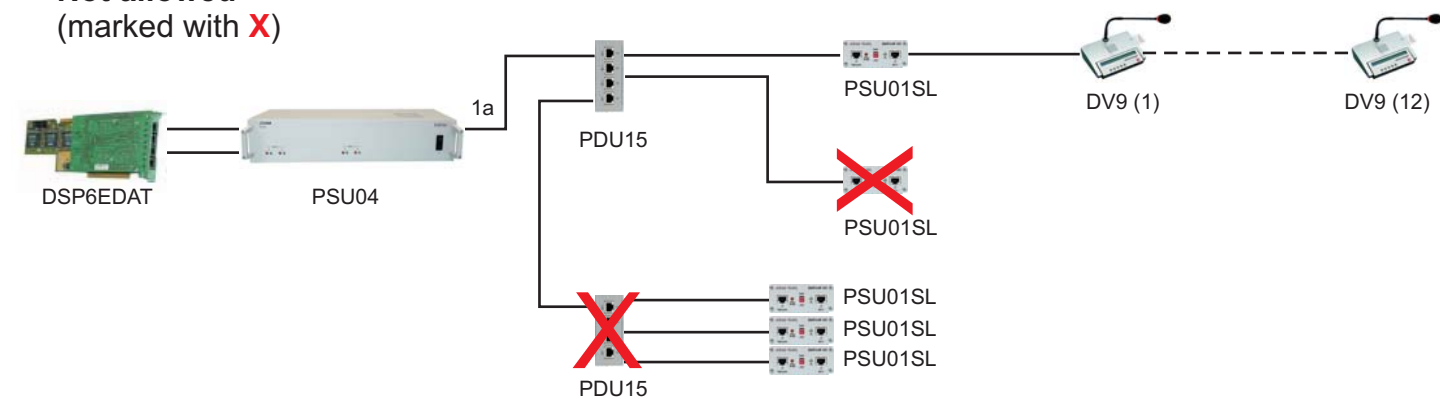

NOTE: PSU01SL is not terminating automatically and therefore it can only be used when a delegate or interpreter unit is allocated to its output (NEXT).
Any open (NEXT) output will cause in non-operation of all connected units on the corresponding PDU15.