

DIGIMIC CMic Slim UTM


Under table solution for microphone unit CMic

Article no.: 05.1090




Introduction and connectors

A microphone unit mounted almost invisibly. This is exactly what the CMic Slim UTM from Brähler Systems offers you. The microphone unit is mounted under the table in simple aluminium housing - only what is really needed is visible: Microphone jack and button. This can be integrated into existing surfaces or control panels according to your wishes. All UTM versions are available in both 8-channel and 32-channel versions.

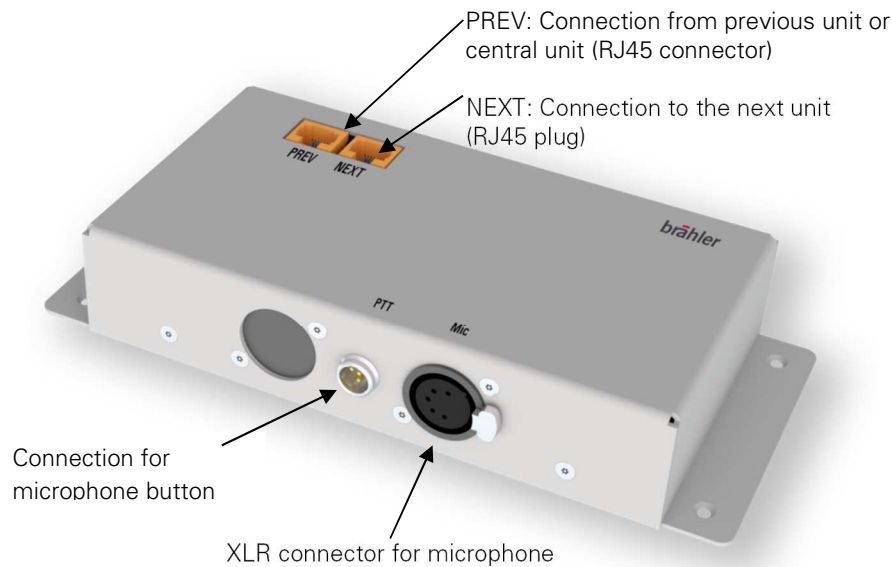


Example system picture
(32 channel version)

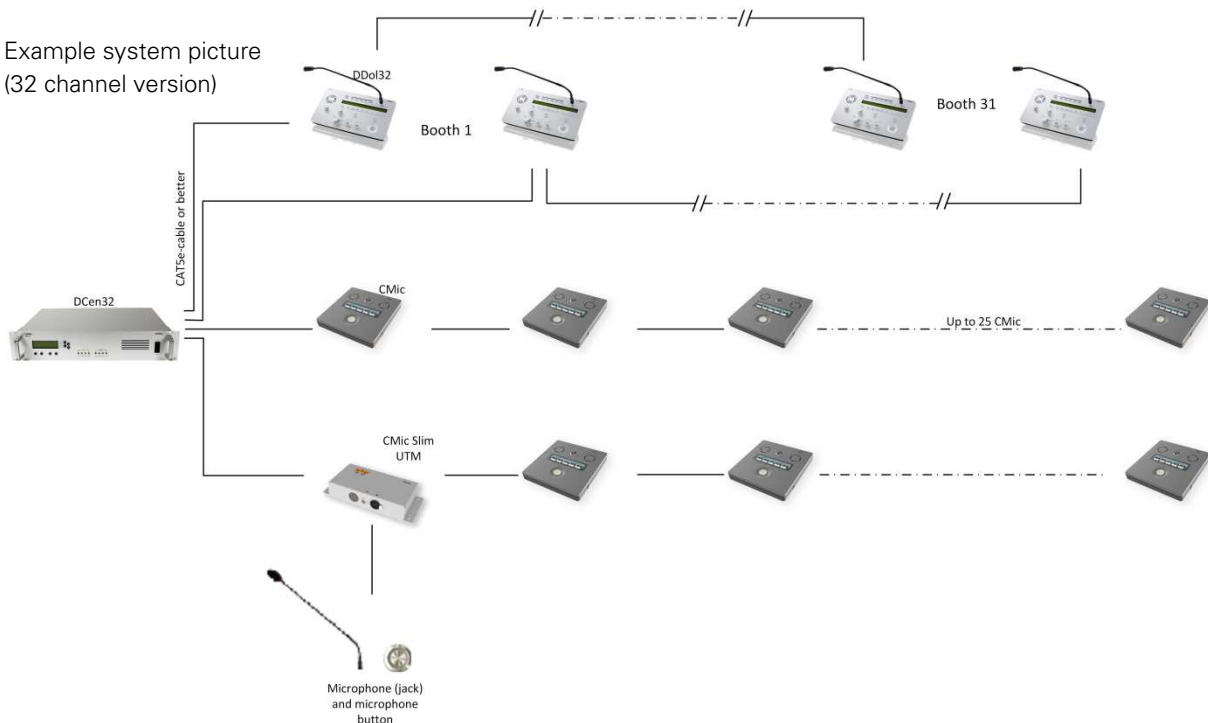

The CMic Slim UTM is not allowed to be connected in a chain with DIGIMIC interpreter units.


Operating

The CMic Slim UTM is designed for installation in the smallest of places - for example under the table. Please refer to the following drawings for the required space. (Please note that you also need space for cables and plugs).

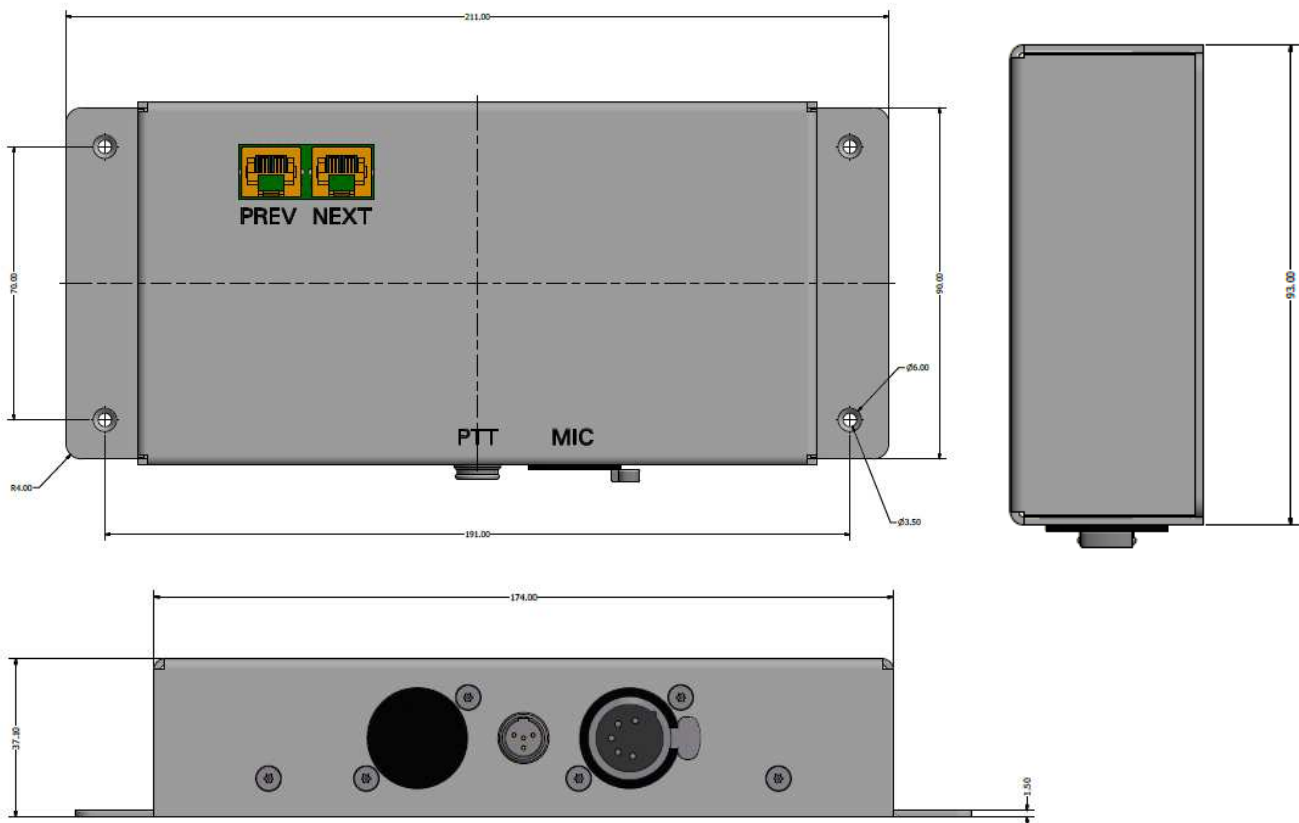


Drill holes in the destination of your microphone and microphone button. Fasten the appropriate modules (button and socket) in the drill holes (for drill sizes, please refer to the corresponding module). Attach the CMic Slim UTM to its destination (drill holes specified, see pictures above).

Now first connect CMic Slim UTM and microphone button and socket. Only use suitable cables.

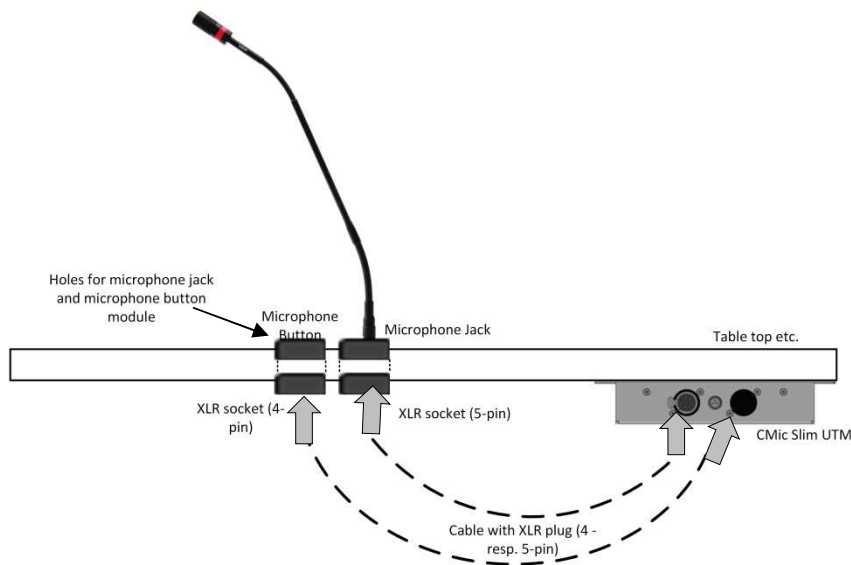

You then establish a connection between your CMic Slim UTM and your DIGIMIC system. Connect the CMic Slim UTM with your central unit or a previous unit (PREV, RJ45 plug) and the following units (NEXT, RJ45 plug).

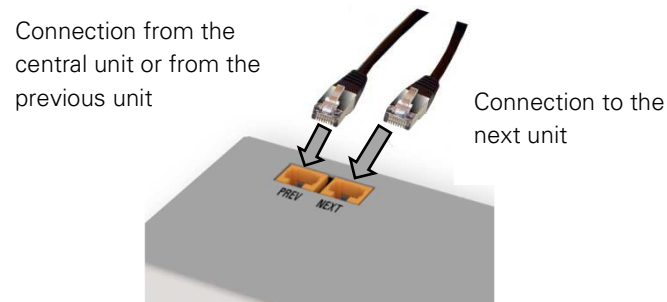

The CMic Slim UTM is immediately ready for use.

Chairman Version

The CMic Slim UTM is also available in a Chairman version. It gives special priority to the chairman of a conference. Press the Override button to mute all delegate units. Two variants can be set on the Central Unit:

Permanent: Press the Override button to mute all delegate units. Delegates must turn on their microphones again to speak.


Temporary: Pressing and holding the override button mutes the delegate units. When you release the Override button, the previously muted delegate units are turned on again.



For the Chairman version of the CMic Slim UTM you need a corresponding "Chairman Microphone Button" module.

Connector assignment

The CMic Slim UTM has the following connector assignment as standard:



Tiny XLR 4-pin (Mic and MUTE buttons)

- 1 GND
- 2 MUTE button (only by Chair Version)
- 3 MIC LED
- 4 MIC button



XLR 5-pin (conference microphone)

- 1 Cable Shield
- 2 Illuminated ring (+)
- 3 Mic. Signal (unbal.)
- 4 Illuminated ring (-)
- 5 Mic. supply (5V)

Warnings



The connectors of the DIGIMIC CMic Slim UTM are only suitable for devices of the DIGIMIC family. Do not connect any other devices!



In case of faults contact a technician, do not try to repair, screw on or similar the CMic Slim UTM by yourself.

Further information about our products can be found on the Internet under:

www.braehler-systems.com

© 2019

Copyright by BRÄHLER Systems GmbH, Königswinter


All rights reserved, in particular (also in extracts) those of translation, reprinting, reproduction by copying or similar procedures.

BRÄHLER Systems reserves the right to make technical changes without prior notice.

Brähler Systems GmbH

Auf der Alten Burg 6

53639 Königswinter, Germany

 +49 2244 8414-4

sales@braehler-systems.com