


Microphone TMD/CL

Clip-on microphone

Article no.: 01.0750

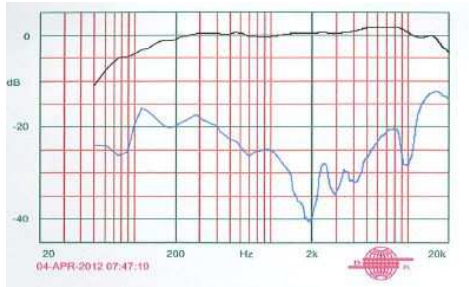

Description

The TMD/CL is a professional clip-on microphone for Brähler Systems' conference systems. Specially developed HF filters in the microphone head provide excellent HF suppression. An illuminated LED ring indicates an active microphone.

The TMD/CL has an effective and robust shock mount and comes with an integrated windscreen. It has a highly flexible 2 m cable connected to a robust Neutrik MINICON connector in matt black.

The TMD/CL has a low susceptibility to interference from mobile phones, PDAs and other wireless devices operating in a conference room.

Properties

Transducer principle

- Electret capacitor

Directional characteristic

- Kidney

Frequency response

- 100Hz - 20KHz

Sensitivity

- (free field open circuit transmission factor)
-43 dB (0 dB = 1V/Pa)

Impedance

- 1 kOhm

Max. SPL (Sound Pressure Level)

- 122 dB

Signal-to-noise ratio

- >72 dB (A-weighted, 1kHz)

Operating voltage

- 5 VDC (1.5V ... 10V)

Light ring

- Colour red
- Current consumption 20 mA

Plug

- Neutrik Minicon

Dimensions

- Total cable length: 2 m
- Diameter: 16.0 mm
- Weight: 66 g

System requirements

System components

The conference microphones are compatible with all microphone consoles from Brähler Systems.