
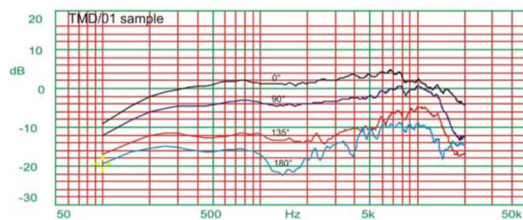


Microphone TMD/01

Conference microphone

Article no.: 01.0701

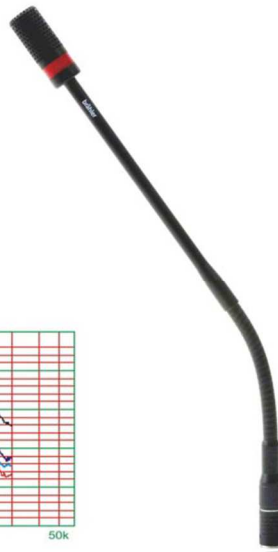

Description

Professional electret microphone with illuminated ring to indicate power-on status. Rigid microphone neck with gooseneck joint and high-quality Neutrik MINICON plug. Matt black surface.

The TMD/01 conference microphone has low sensitivity to interference from mobile phones, PDA's and other wireless devices within the conference room.

Features

Transducer principle

- Electret capacitor

Directional characteristic

- Kidney

Audio transmission range

- 90 Hz ... 20,000 Hz, see diagram

Sensitivity

- (free field open circuit transmission factor)
-43 dB (0 dB = 1V/Pa)

Impedance

- 1 kOhm

Signal distance

- >68 dB (A) (1kHz)

Limiting sound pressure level

- 120 dB

Operating voltage

- 5 VDC; (1.5 ... 9V)

Light ring

- Colour red
- Current consumption 20 mA

Plug

- Neutrik Minicon, lockable

Dimensions

- Total length: 360 mm (or 400 mm and 500 mm)
- Diameter: 16 mm
- Weight: 80 g to 100 g (depending on version)

System requirements

System components

The conference microphones are compatible with all microphone consoles from Brähler Systems.

Variants

- TMD/01 (360 mm)
Article no.: 01.0701
- TMD/01 SM (360 mm)
Article no.: 01.0711
- TMD01/01-S2
(double gooseneck, 410mm)
Article no.: 01.0701.S2